



STAR OPOS CONTROL

Application Development Guide POSPrinter

Version 1.8.2E May. 2005

STAR MICRONICS CO.,LTD.

Contents

SECTION 1 HOW TO SET UP.....1

SECTION 2 CAUTIONS.....3


SECTION 3 DIRECTIO USAGE4

SECTION 4 RESULTCODE LIST.....5


SECTION 5 PROPERTY LIST9

SECTION 1 HOW TO SET UP


Step 1. Start "OPOS POSPrinter Register" and set up

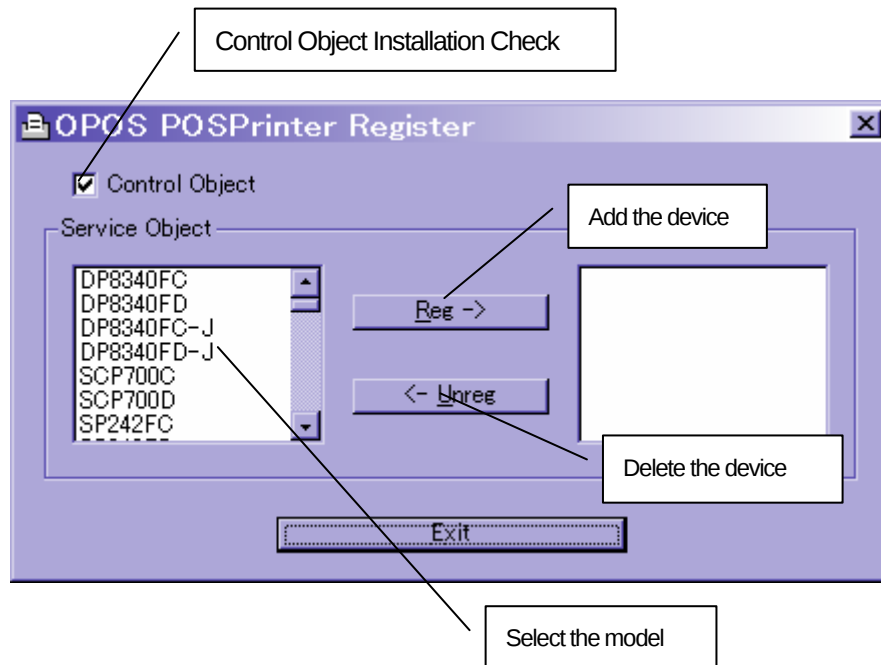

Step 2. Setting the detail of the selected device

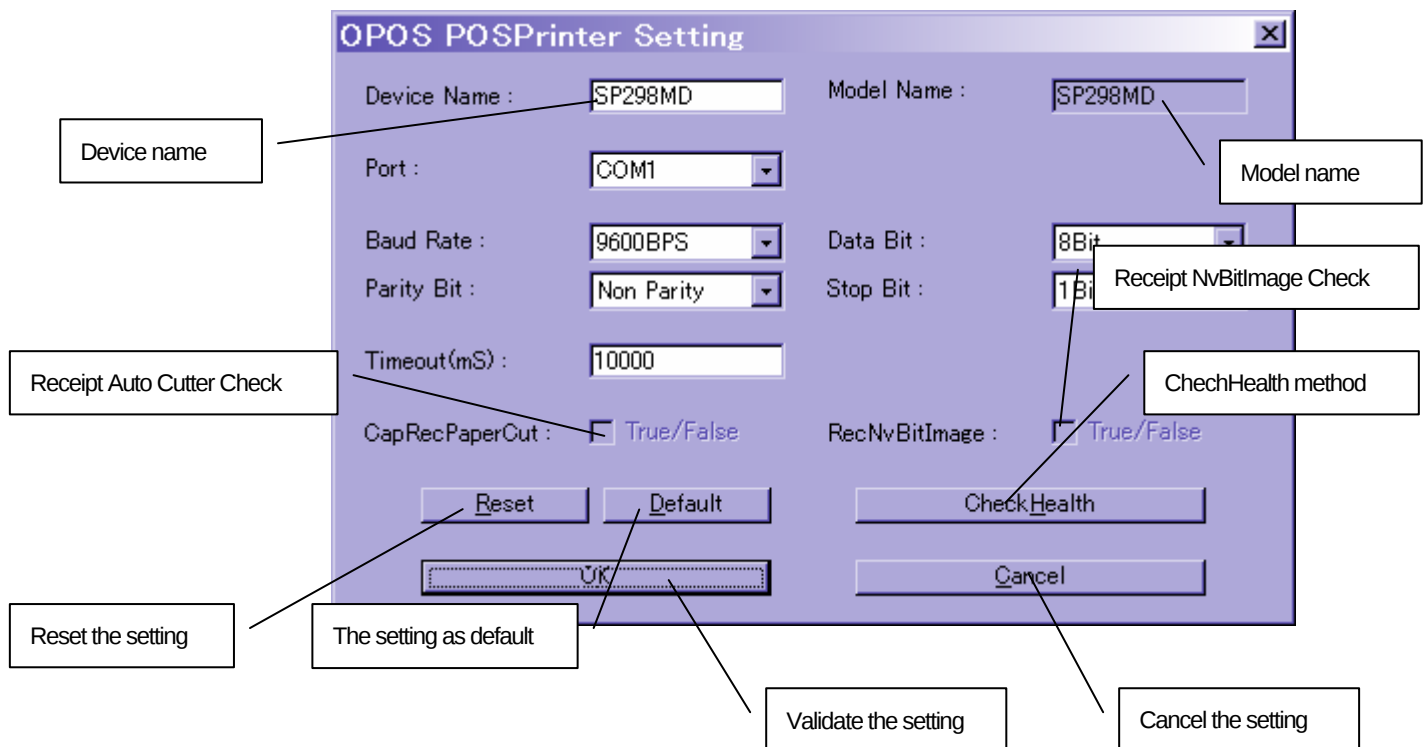

Step 3. Finish the set up

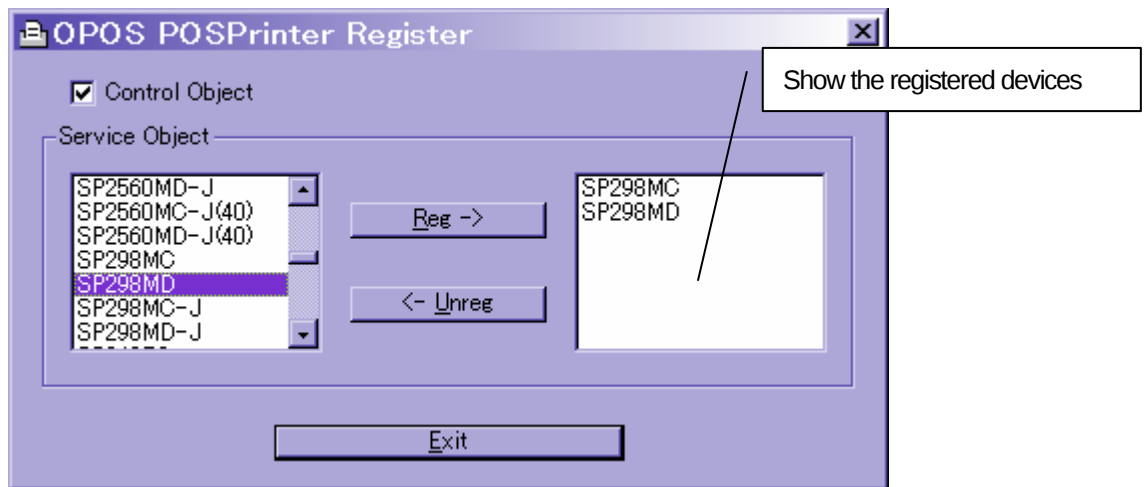

SECTION 2 CAUTIONS

- 1) When you would like to uninstall, start "OPOS POSPrinter Register" and confirm that the installation check of the Control Object is OFF and that the registered device list is blank before do it.
- 2) Select DTR mode for handshaking with the printer.
- 3) Some printers may have the property and the OPOS escape sequence which can be set only at the top of the lines and might be limited at the rotation printing. Refer to the manual and Control Guide Book of each device for more detail.

SECTION 3 DIRECTIO USAGE

DirectIO Method

None

DirectIO Event

None

SECTION 4 RESULTCODE LIST

Method	ResultCode	ResultCodeExtended
Open	OPOS_SUCCESS	-
	OPOS_E_NOSERVICE	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOEXIST	-
Close	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
ClaimDevice	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_TIMEOUT	-
ReleaseDevice	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
CheckHealth	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_BUSY	-
ClearOutput	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
DirectIO	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
ResetStatistics	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
RetrieveStatistics	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
UpdateStatistics	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
PrintNormal	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_JRN_EMPTY
		OPOS_EPTR_REC_EMPTY
		OPOS_EPTR_SLP_EMPTY

PrintTwoNormal	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E BUSY	-
PrintImmediate	OPOS SUCCESS	-
	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E NOHARDWARE	-
	OPOS E OFFLINE	-
	OPOS E TIMEOUT	-
	OPOS_EXTENDED	OPOS EPTR COVER OPEN OPOS EPTR JRN EMPTY OPOS EPTR REC EMPTY OPOS EPTR SLP EMPTY
BeginInsertion	OPOS SUCCESS	-
	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E TIMEOUT	-
	OPOS E BUSY	-
EndInsertion	OPOS SUCCESS	-
	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E BUSY	-
	OPOS E EXTENDED	OPOS EPTR SLP EMPTY
BeginRemoval	OPOS SUCCESS	-
	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E TIMEOUT	-
	OPOS E BUSY	-
EndRemoval	OPOS SUCCESS	-
	OPOS E CLOSED	-
	OPOS E NOTCLAIMED	-
	OPOS E DISABLED	-
	OPOS E ILLEGAL	-
	OPOS E BUSY	-
	OPOS E EXTENDED	OPOS EPTR SLP FORM

CutPaper	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_REC_EMPTY
RotatePrint	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_JRN_EMPTY
		OPOS_EPTR_REC_EMPTY
		OPOS_EPTR_SLP_EMPTY
PrintBarCode	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_REC_EMPTY
		OPOS_EPTR_SLP_EMPTY
PrintBitmap	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_NOEXIST	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_TOOBIG
		OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_BADFORMAT
		OPOS_EPTR_REC_EMPTY
		OPOS_EPTR_SLP_EMPTY

TransactionPrint	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOHARDWARE	-
	OPOS_E_OFFLINE	-
	OPOS_E_TIMEOUT	-
	OPOS_E_BUSY	-
	OPOS_EXTENDED	OPOS_EPTR_COVER_OPEN
		OPOS_EPTR_JRN_EMPTY
		OPOS_EPTR_REC_EMPTY
		OPOS_EPTR_SLP_EMPTY
ValidateData	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_FAILURE	-
SetBitmap	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
	OPOS_E_NOEXIST	-
	OPOS_EXTENDED	OPOS_EPTR_TOOBIG
		OPOS_EPTR_BADFORMAT
SetLogo	OPOS_SUCCESS	-
	OPOS_E_CLOSED	-
	OPOS_E_NOTCLAIMED	-
	OPOS_E_DISABLED	-
	OPOS_E_ILLEGAL	-
ChangePrintSide	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-
MarkFeed	OPOS_E_CLOSED	-
	OPOS_E_ILLEGAL	-

SECTION 5 PROPERTY LIST

Property	DP8340FC	DP8340FD	DP8340FC-J	DP8340FD-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANA	PTR_CCS_KANA
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	TRUE	TRUE	TRUE	TRUE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	FALSE	FALSE	FALSE	FALSE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	FALSE	FALSE	FALSE	FALSE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SCP700C	SCP700D	-	-
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	-	-
CapStatisticsReporting	FALSE	FALSE	-	-
CapUpdateStatistics	FALSE	FALSE	-	-
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	-	-
CapConcurrentJmRec	FALSE	FALSE	-	-
CapConcurrentJmSlp	FALSE	FALSE	-	-
CapConcurrentRecSlp	FALSE	FALSE	-	-
CapCoverSensor	TRUE	TRUE	-	-
CapMapCharacterSet	TRUE	TRUE	-	-
CapTransaction	TRUE	TRUE	-	-
CapJmPresent	FALSE	FALSE	-	-
CapJm2Color	FALSE	FALSE	-	-
CapJmBold	FALSE	FALSE	-	-
CapJmDhigh	FALSE	FALSE	-	-
CapJmDwide	FALSE	FALSE	-	-
CapJmDwideDhigh	FALSE	FALSE	-	-
CapJmEmptySensor	FALSE	FALSE	-	-
CapJmItalic	FALSE	FALSE	-	-
CapJmNearEndSensor	FALSE	FALSE	-	-
CapJmUnderline	FALSE	FALSE	-	-
CapJmCartridgeSensor	0	0	-	-
CapJmColor	0	0	-	-
CapRecPresent	TRUE	TRUE	-	-
CapRec2Color	FALSE	FALSE	-	-
CapRecBarCode	TRUE	TRUE	-	-
CapRecBitmap	TRUE	TRUE	-	-
CapRecBold	TRUE	TRUE	-	-
CapRecDhigh	TRUE	TRUE	-	-
CapRecDwide	TRUE	TRUE	-	-
CapRecDwideDhigh	TRUE	TRUE	-	-
CapRecEmptySensor	TRUE	TRUE	-	-
CapRecItalic	FALSE	FALSE	-	-
CapRecLeft90	FALSE	FALSE	-	-
CapRecNearEndSensor	FALSE	FALSE	-	-
CapRecPapercut	TRUE	TRUE	-	-
CapRecRight90	FALSE	FALSE	-	-
CapRecRotate180	TRUE	TRUE	-	-
CapRecStamp	FALSE	FALSE	-	-
CapRecUnderline	TRUE	TRUE	-	-
CapRecCartridgeSensor	0	0	-	-
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	-	-
CapRecMarkFeed	0	0	-	-
CapSlpPresent	TRUE	TRUE	-	-
CapSlpFullslip	TRUE	TRUE	-	-
CapSlp2Color	FALSE	FALSE	-	-
CapSlpBarCode	FALSE	FALSE	-	-
CapSlpBitmap	TRUE	TRUE	-	-
CapSlpBold	TRUE	TRUE	-	-
CapSlpDhigh	FALSE	FALSE	-	-
CapSlpDwide	TRUE	TRUE	-	-
CapSlpDwideDhigh	FALSE	FALSE	-	-
CapSlpEmptySensor	FALSE	TRUE	-	-
CapSlpItalic	FALSE	FALSE	-	-
CapSlpLeft90	TRUE	TRUE	-	-
CapSlpNearEndSensor	FALSE	TRUE	-	-
CapSlpRight90	TRUE	TRUE	-	-
CapSlpRotate180	TRUE	TRUE	-	-
CapSlpUnderline	TRUE	TRUE	-	-
CapSlpBothSidesPrint	FALSE	FALSE	-	-
CapSlpCartridgeSensor	0	0	-	-
CapSlpColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	-	-

Property	SP242FC	SP242FD	SP242FC-J	SP242FD-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_NONE	OPOS_PR_NONE	OPOS_PR_NONE
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANA	PTR_CCS_KANA
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	FALSE	TRUE	FALSE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	FALSE	FALSE	FALSE	FALSE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	FALSE	TRUE	FALSE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	FALSE	FALSE	FALSE	FALSE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	FALSE	FALSE	FALSE	FALSE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP246FC	SP246FD	SP246FC-J	SP246FD-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_NONE	OPOS_PR_NONE	OPOS_PR_NONE
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANA	PTR_CCS_KANA
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	FALSE	TRUE	FALSE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	TRUE	TRUE	TRUE	TRUE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	FALSE	FALSE	FALSE	FALSE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	FALSE	TRUE	FALSE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	FALSE	FALSE	FALSE	FALSE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	FALSE	FALSE	FALSE	FALSE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP2520MC	SP2520MD	SP2520MC(40)	SP2520MD(40)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP2520MC-J	SP2520MD-J	SP2520MC-J(40)	SP2520MD-J(40)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP2560MC	SP2560MD	SP2560MC(40)	SP2560MD(40)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	TRUE	TRUE	TRUE	TRUE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP2560MC-J	SP2560MD-J	SP2560MC-J(40)	SP2560MD-J(40)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	TRUE	TRUE	TRUE	TRUE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1	PTR_COLOR_PRIMARY + PTR_COLOR_CUSTOM1
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP298MC	SP298MD	SP298MC-J	SP298MD-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	FALSE	FALSE	FALSE	FALSE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	FALSE	FALSE	FALSE	FALSE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	FALSE	FALSE	FALSE	FALSE
CapRecBold	FALSE	FALSE	FALSE	FALSE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	FALSE	FALSE	FALSE	FALSE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	FALSE	FALSE	FALSE	FALSE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	FALSE	FALSE	FALSE	FALSE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	FALSE	FALSE	FALSE	FALSE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	FALSE	FALSE	FALSE	FALSE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	0	0	0	0
CapRecMarkFeed	0	0	0	0
CapSlpPresent	TRUE	TRUE	TRUE	TRUE
CapSlpFullslip	TRUE	TRUE	TRUE	TRUE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	TRUE	TRUE	TRUE	TRUE
CapSlpBold	TRUE	TRUE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	TRUE	TRUE	TRUE	TRUE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	TRUE	TRUE	TRUE	TRUE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	TRUE	TRUE	TRUE	TRUE
CapSlpNearEndSensor	FALSE	TRUE	FALSE	TRUE
CapSlpRight90	TRUE	TRUE	TRUE	TRUE
CapSlpRotate180	TRUE	TRUE	TRUE	TRUE
CapSlpUnderline	TRUE	TRUE	TRUE	TRUE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY

Property	SP342FC	SP342FD	SP342FC(2.25)	SP342FD(2.25)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP342FC-J	SP342FD-J	SP342FC-J(2.25)	SP342FD-J(2.25)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	FALSE	FALSE	FALSE	FALSE
CapRecDhigh	FALSE	FALSE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	SP542MC	SP542MD	SP542MC(2.25)	SP542MD(2.25)
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP2043C	TSP2043D	-	-
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	-	-
CapStatisticsReporting	FALSE	FALSE	-	-
CapUpdateStatistics	FALSE	FALSE	-	-
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	-	-
CapConcurrentJmRec	FALSE	FALSE	-	-
CapConcurrentJmSlp	FALSE	FALSE	-	-
CapConcurrentRecSlp	FALSE	FALSE	-	-
CapCoverSensor	TRUE	TRUE	-	-
CapMapCharacterSet	TRUE	TRUE	-	-
CapTransaction	TRUE	TRUE	-	-
CapJmPresent	FALSE	FALSE	-	-
CapJm2Color	FALSE	FALSE	-	-
CapJmBold	FALSE	FALSE	-	-
CapJmDhigh	FALSE	FALSE	-	-
CapJmDwide	FALSE	FALSE	-	-
CapJmDwideDhigh	FALSE	FALSE	-	-
CapJmEmptySensor	FALSE	FALSE	-	-
CapJmItalic	FALSE	FALSE	-	-
CapJmNearEndSensor	FALSE	FALSE	-	-
CapJmUnderline	FALSE	FALSE	-	-
CapJmCartridgeSensor	0	0	-	-
CapJmColor	0	0	-	-
CapRecPresent	TRUE	TRUE	-	-
CapRec2Color	FALSE	FALSE	-	-
CapRecBarCode	TRUE	TRUE	-	-
CapRecBitmap	TRUE	TRUE	-	-
CapRecBold	TRUE	TRUE	-	-
CapRecDhigh	TRUE	TRUE	-	-
CapRecDwide	TRUE	TRUE	-	-
CapRecDwideDhigh	TRUE	TRUE	-	-
CapRecEmptySensor	TRUE	TRUE	-	-
CapRecItalic	FALSE	FALSE	-	-
CapRecLeft90	FALSE	FALSE	-	-
CapRecNearEndSensor	FALSE	FALSE	-	-
CapRecPapercut	TRUE	TRUE	-	-
CapRecRight90	FALSE	FALSE	-	-
CapRecRotate180	TRUE	TRUE	-	-
CapRecStamp	FALSE	FALSE	-	-
CapRecUnderline	TRUE	TRUE	-	-
CapRecCartridgeSensor	0	0	-	-
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	-	-
CapRecMarkFeed	0	0	-	-
CapSlpPresent	FALSE	FALSE	-	-
CapSlpFullslip	FALSE	FALSE	-	-
CapSlp2Color	FALSE	FALSE	-	-
CapSlpBarCode	FALSE	FALSE	-	-
CapSlpBitmap	FALSE	FALSE	-	-
CapSlpBold	FALSE	FALSE	-	-
CapSlpDhigh	FALSE	FALSE	-	-
CapSlpDwide	FALSE	FALSE	-	-
CapSlpDwideDhigh	FALSE	FALSE	-	-
CapSlpEmptySensor	FALSE	FALSE	-	-
CapSlpItalic	FALSE	FALSE	-	-
CapSlpLeft90	FALSE	FALSE	-	-
CapSlpNearEndSensor	FALSE	FALSE	-	-
CapSlpRight90	FALSE	FALSE	-	-
CapSlpRotate180	FALSE	FALSE	-	-
CapSlpUnderline	FALSE	FALSE	-	-
CapSlpBothSidesPrint	FALSE	FALSE	-	-
CapSlpCartridgeSensor	0	0	-	-
CapSlpColor	0	0	-	-

Property	TSP242C	TSP242D	TSP242C-J	TSP242D-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP442C	TSP442D	TSP442C-J	TSP442D-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)	TRUE (FALSE)
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP552C	TSP552D	TSP552C-J	TSP552D-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP643C	TSP643D	TSP643E	TSP643U
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP643C-J	TSP643D-J	TSP643E-J	TSP643U-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP743C	TSP743D	TSP743E	TSP743U
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP743C-J	TSP743D-J	TSP743E-J	TSP743U-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP847C	TSP847D	TSP847E	TSP847U
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TSP847C-J	TSP847D-J	TSP847E-J	TSP847U-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TUP452C	TUP452D	TUP452C-J	TUP452D-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	FALSE	TRUE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TUP452V2C	TUP452V2D	TUP452V2C-J	TUP452V2D-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	FALSE	TRUE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TUP942C	TUP942D	TUP942E	TUP942U
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_ASCII
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property	TUP942C-J	TUP942D-J	TUP942E-J	TUP942U-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_STANDARD	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	TRUE	TRUE	TRUE	TRUE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	TRUE	TRUE
CapRecDhigh	TRUE	TRUE	TRUE	TRUE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	TRUE	TRUE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	TRUE	TRUE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Property/Product	UP389FC	UP389FD	UP389FC-J	UP389FD-J
CapPowerReporting	OPOS_PR_NONE	OPOS_PR_STANDARD	OPOS_PR_NONE	OPOS_PR_STANDARD
CapStatisticsReporting	FALSE	FALSE	FALSE	FALSE
CapUpdateStatistics	FALSE	FALSE	FALSE	FALSE
CapCharacterSet	PTR_CCS_ASCII	PTR_CCS_ASCII	PTR_CCS_KANJI	PTR_CCS_KANJI
CapConcurrentJmRec	FALSE	FALSE	FALSE	FALSE
CapConcurrentJmSlp	FALSE	FALSE	FALSE	FALSE
CapConcurrentRecSlp	FALSE	FALSE	FALSE	FALSE
CapCoverSensor	TRUE	TRUE	TRUE	TRUE
CapMapCharacterSet	TRUE	TRUE	TRUE	TRUE
CapTransaction	TRUE	TRUE	TRUE	TRUE
CapJmPresent	FALSE	FALSE	FALSE	FALSE
CapJm2Color	FALSE	FALSE	FALSE	FALSE
CapJmBold	FALSE	FALSE	FALSE	FALSE
CapJmDhigh	FALSE	FALSE	FALSE	FALSE
CapJmDwide	FALSE	FALSE	FALSE	FALSE
CapJmDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapJmEmptySensor	FALSE	FALSE	FALSE	FALSE
CapJmItalic	FALSE	FALSE	FALSE	FALSE
CapJmNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapJmUnderline	FALSE	FALSE	FALSE	FALSE
CapJmCartridgeSensor	0	0	0	0
CapJmColor	0	0	0	0
CapRecPresent	TRUE	TRUE	TRUE	TRUE
CapRec2Color	FALSE	FALSE	FALSE	FALSE
CapRecBarCode	FALSE	FALSE	FALSE	FALSE
CapRecBitmap	TRUE	TRUE	TRUE	TRUE
CapRecBold	TRUE	TRUE	FALSE	FALSE
CapRecDhigh	TRUE	TRUE	FALSE	FALSE
CapRecDwide	TRUE	TRUE	TRUE	TRUE
CapRecDwideDhigh	TRUE	TRUE	FALSE	FALSE
CapRecEmptySensor	TRUE	TRUE	TRUE	TRUE
CapRecItalic	FALSE	FALSE	FALSE	FALSE
CapRecLeft90	FALSE	FALSE	FALSE	FALSE
CapRecNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapRecPapercut	TRUE	TRUE	TRUE	TRUE
CapRecRight90	FALSE	FALSE	FALSE	FALSE
CapRecRotate180	TRUE	TRUE	TRUE	TRUE
CapRecStamp	FALSE	FALSE	FALSE	FALSE
CapRecUnderline	TRUE	TRUE	TRUE	TRUE
CapRecCartridgeSensor	0	0	0	0
CapRecColor	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY	PTR_COLOR_PRIMARY
CapRecMarkFeed	0	0	0	0
CapSlpPresent	FALSE	FALSE	FALSE	FALSE
CapSlpFullslip	FALSE	FALSE	FALSE	FALSE
CapSlp2Color	FALSE	FALSE	FALSE	FALSE
CapSlpBarCode	FALSE	FALSE	FALSE	FALSE
CapSlpBitmap	FALSE	FALSE	FALSE	FALSE
CapSlpBold	FALSE	FALSE	FALSE	FALSE
CapSlpDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpDwide	FALSE	FALSE	FALSE	FALSE
CapSlpDwideDhigh	FALSE	FALSE	FALSE	FALSE
CapSlpEmptySensor	FALSE	FALSE	FALSE	FALSE
CapSlpItalic	FALSE	FALSE	FALSE	FALSE
CapSlpLeft90	FALSE	FALSE	FALSE	FALSE
CapSlpNearEndSensor	FALSE	FALSE	FALSE	FALSE
CapSlpRight90	FALSE	FALSE	FALSE	FALSE
CapSlpRotate180	FALSE	FALSE	FALSE	FALSE
CapSlpUnderline	FALSE	FALSE	FALSE	FALSE
CapSlpBothSidesPrint	FALSE	FALSE	FALSE	FALSE
CapSlpCartridgeSensor	0	0	0	0
CapSlpColor	0	0	0	0

Remarks:

- 1) Reproduction of any part of this documentation is prohibited.
- 2) The contents of this documentation are subject to change without notice.
- 3) We can assume no responsibility for any results which may come out of the usage instructed in this documentation.

Trademarks:

Company and product names are trademarks or registered trademarks of their respective companies.